

# LED High Bay UFO-C

## FEATURES & SPECIFICATIONS

**INTENDED USE:** The Venas Lighting UFO LED High bay is an affordable LED solution for users who prefer a luminaire with the look and feel of a round form factor. It delivers comfortable and uniform lighting from mounting heights up to 33ft.

**CONSTRUCTION:** It features a black die-cast aluminum housing. Dark powder coat corrosion resistant finish provides long hours salt fog rating. Corrosion resistant external hardware standard.

**OPTICS:** Placement, spacing, and aperture of LEDs provides a 120 degree spread of light.


**ELECTRICAL:** High-efficiency LEDs. Input voltage is AC (120-277V) or AC (120-347V).

**LISTINGS:** UL / cUL / DLC / IP65. UL/c-UL listed to US and Canadian Safety Standards. Wet location listed. For use under covered ceilings. For safe use in ambient temperatures from -40°F (-40°C) to 131°F(+55°C).

**WARRANTY:** 5-year limited warranty against defects in manufacturing.

**APPLICATION:** Warehouse, airports, exhibition centers, shopping centers, supermarkets, stadiums, toll stations, subways, etc.

**NOTE:** Actual performance may differ as a result of end-user environment and application.


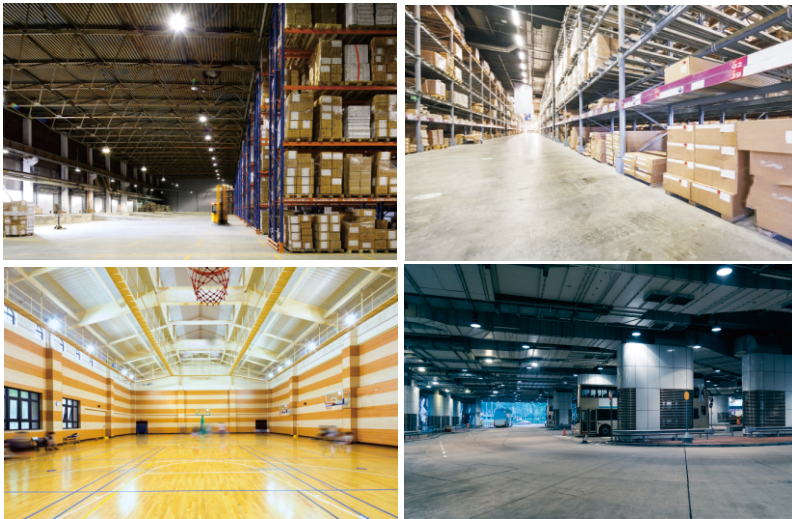


U-	xxxW	Ei	Y	Z	T	X	X
UFO Light	80-240W	E Represents Series E	Y=N, Represents Non-dimmable Y=D, Represents Dimmable	Z Represents CCT 27=2700K, 30=3000K, 40=4000K, 50=5000K, 57=5700K, 65=6500K	T=D60 Represents 60° T=D90, Represents 90° T=D120, Represents 120°	X=A, B No specific meaning	Voltage X=(120-277V), X=(120-347V)



# Technical Data

Model No.	U-80WE1YZTXX	U-100WE1YZTXX	U-120WE2YZTXX	U-150WE2YZTXX	U-180WE2YZTXX	U-200WE3YZTXX	U-240WE3YZTXX
LED Power(W)	80	100	120	150	180	200	240
Light Efficiency One	130lm/W						
Beam Angle	90°						
Input Voltage	100-277V/ 120-347V						
Lumens(Lm)	10400	13000	15600	19500	23400	26000	31200
Product Size(mm)	Φ248×H167	Φ248×H167	Φ289×174	Φ289×174	Φ289×174	Φ336×191	Φ336×191
CRI	>80						
PF	>0.9						
CCT	3000K / 4000K / 4500K / 5000K						



## Dimension(mm/inch)



80W/100W




120W/150W/180W




200W/240W

## Product Demonstration

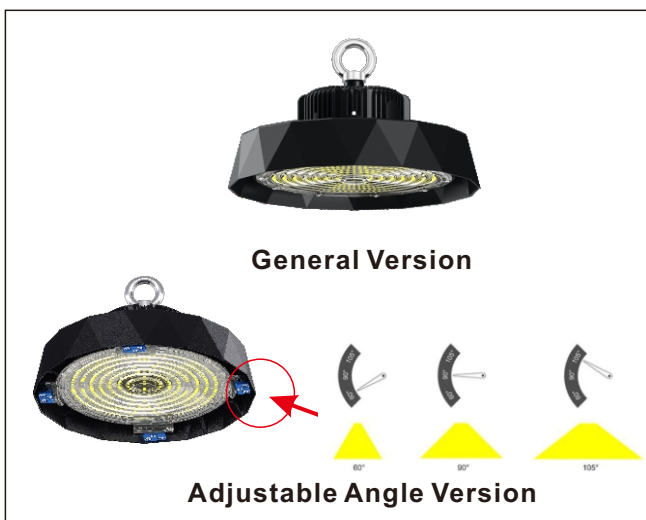

## Photometric Data

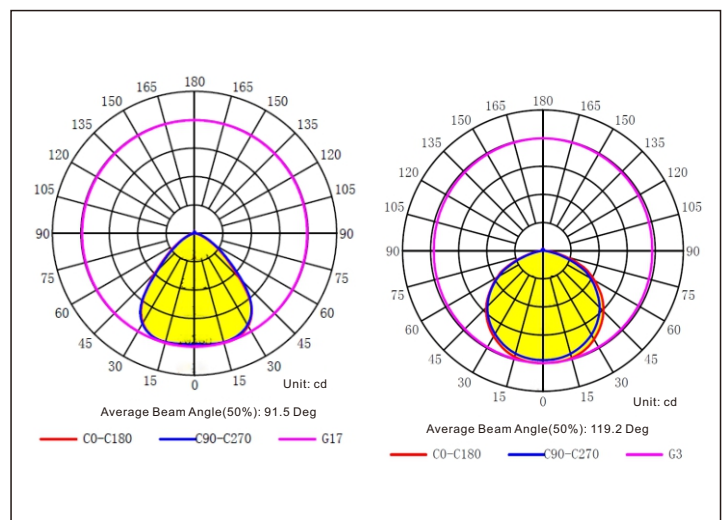

## Package Information

Model	Wattage(W)	Product Weight	Package Weight	Package Size(L×W×H)	PC/Carton
E1	80/100	2.1KG	2.6KG	294×294×180mm	1
E2	120/150/180	2.6KG	3.3KG	336×336×200mm	1
E3	200/240	3.6KG	4.5KG	387×387×210mm	1